

ENTRY LINE


E3

BLAST CHILLER / BLAST FREEZER

3 TRAYS GN 1/1

ABBATTITORE / SURGELATORE RAPIDO

3 TEGLIE GN 1/1

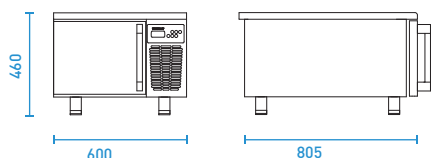

MODEL E3

CODE 250A0104

POWER SUPPLY
ALIMENTAZIONE ELETTRICA
230V/1Ph/50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:600 P/d:805 H:460 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:340 P/d:560 H:270 mm

POWER RATING
POTENZA ASSORBITA
0,72 Kw / 3,8 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°/+45°) = 533 W
(-40°/+45°) = 92 W

BLAST CHILLING
RESA ABBATTIMENTO
90°C +3°C in 90' = 7,0 Kg

BLAST FREEZING
RESA SURGELAZIONE
90°C -18°C in 240' = 5,0 Kg

DEFROSTING
SBRINAMENTO
By air / Ad aria

REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
55 Kg/ 62 Kg

PACKAGING (WxDxH)
MISURE IMBALLO
710 x 820 x 500 mm

E5

BLAST CHILLER / BLAST FREEZER

5 TRAYS GN 1/1 - EN600X400

ABBATTITORE / SURGELATORE RAPIDO

5 TEGLIE GN1/1 - EN600X400



MODEL E5

CODE 355A0104

POWER SUPPLY
ALIMENTAZIONE ELETTRICA
400V/3Ph/50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:820 P/d:740 H:900 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:700 P/d:450 H:375 mm

POWER RATING
POTENZA ASSORBITA
1,0 Kw / 7 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°/+45°) = 1297 W
(-40°/+45°) = 273 W

BLAST CHILLING
RESA ABBATTIMENTO
90°C +3°C in 90' = 18,0 Kg

BLAST FREEZING
RESA SURGELAZIONE
90°C -18°C in 240' = 9,0 Kg

DEFROSTING
SBRINAMENTO
By air / Ad aria

REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
95 Kg/ 105 Kg

PACKAGING (WxDxH)
MISURE IMBALLO
850 x 830 x 1070 mm


E8

BLAST CHILLER / BLAST FREEZER

8 TRAYS GN 1/1 - EN600X400

ABBATTITORE / SURGELATORE RAPIDO

8 TEGLIE GN1/1 - EN600X400

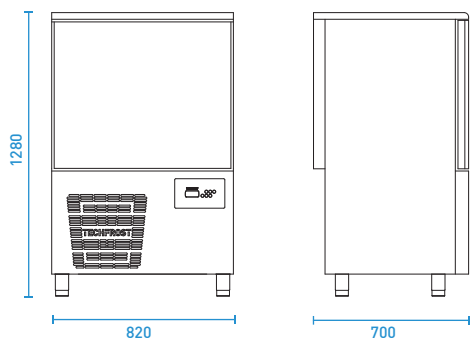

MODEL E8

CODE 358A0104

POWER SUPPLY
ALIMENTAZIONE ELETTRICA
230V/1Ph/50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:820 P/d:700 H:1280 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:700 P/d:450 H:600 mm

POWER RATING
POTENZA ASSORBITA
1,4 Kw / 7 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°/+45°) = 2205 W
(-40°/+45°) = 349 W

BLAST CHILLING
RESA ABBATTIMENTO
90°C +3°C in 90' = 25 Kg

BLAST FREEZING
RESA SURGELAZIONE
90°C -18°C in 240' = 16 Kg

DEFROSTING
SBRINAMENTO
By air / Ad aria

REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
140 Kg / 150 Kg

PACKAGING (WxDxH)
MISURE IMBALLO
840 x 740 x 1450 mm



E10

BLAST CHILLER / BLAST FREEZER

10 TRAYS GN 1/1 - EN600X400

ABBATTITORE / SURGELATORE RAPIDO

10 TEGLIE GN1/1 - EN600X400

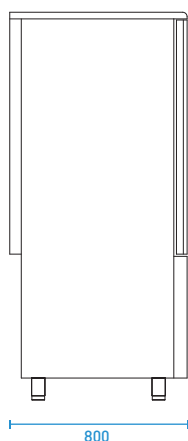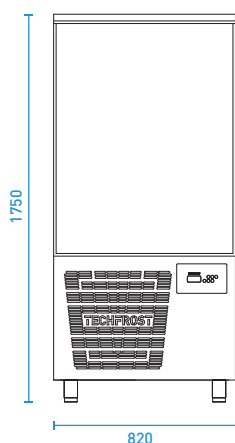

MODEL E10

CODE 363A0104

POWER SUPPLY
ALIMENTAZIONE ELETTRICA
400V/3Ph/50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:820 P/d:800 H:1750 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:700 P/d:450 H:1000 mm

POWER RATING
POTENZA ASSORBITA
2,4 Kw / 8,5 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°C/+45°C) = 4285 W
(-40°C/+45°C) = 765 W

BLAST CHILLING
RESA ABBATTIMENTO
90°C +3°C in 90' = 28 Kg

BLAST FREEZING
RESA SURGELAZIONE
90°C -18°C in 240' = 18 Kg

DEFROSTING
SBRINAMENTO
By air / Ad aria

REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
190 Kg/ 200 Kg

PACKAGING (WxDxH)
MISURE IMBALLO
840 x 840 x 1900 mm

ENTRY LINE


E15

BLAST CHILLER / BLAST FREEZER

15 TRAYS GN 1/1 - EN600X400

ABBATTITORE / SURGELATORE RAPIDO

15 TEGLIE GN1/1 - EN600X400

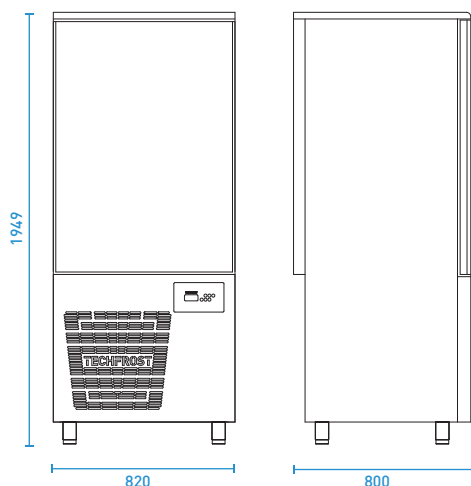

MODEL E15

CODE 369A0104

POWER SUPPLY
ALIMENTAZIONE ELETTRICA
400V/3Ph/50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:820 P/d:800 H:1949 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:700 P/d:450 H:1100 mm

POWER RATING
POTENZA ASSORBITA
3,4 Kw / 8,5 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°C/+45°C) = 4285 W
(-40°C/+45°C) = 765 W

BLAST CHILLING
RESA ABBATTIMENTO
90°C +3°C in 90' = 45 Kg

BLAST FREEZING
RESA SURGELAZIONE
90°C -18°C in 240' = 27 Kg

DEFROSTING
SBRINAMENTO
By air / Ad aria

REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)


NET/GROSS WEIGHT
PESO NETTO/LORDO
210 Kg/ 220 Kg

PACKAGING (WxDxH)
MISURE IMBALLO
840 x 840 x 2080 mm

SUPREME LINE

SG30

CABINET 20 TRAYS
GN 2/1 -2°C/+8°C
CONSERVATORE 20 TEGLIE
GN 2/1 -2°C/+8°C

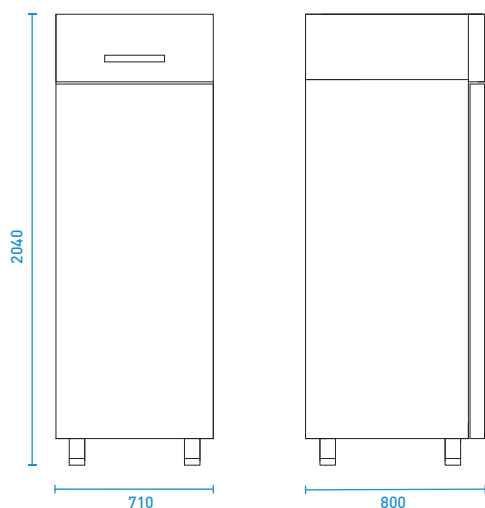

MODEL SG30
CODE 600C0115

CAPACITY TRAYS
CAPACITÀ TEGLIE
20 trays GN 2/1
20 teglie GN 2/1

CAPACITY LITERS
CAPACITÀ LITRI
700

OPERATING TEMPERATURE
TEMPERATURA DI ESERCIZIO
-2°C / +8°C

POWER REQUIREMENTS
ALIMENTAZIONE ELETTRICA
230V / 1Ph / 50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:710 P/d:800 H:2040 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:650 P/d:675 H:1400 mm

POWER RATING
POTENZA ASSORBITA
0,70 Kw / 3,8 A

COOLING CAPACITY
RESA FRIGORIFERA
(+5°C / +45°C) = 1110 W
(-10°C / +45°C) = 645 W

DEFROSTING
SBRINAMENTO
Electric / Elettrico


REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
130 kg / 140 kg

PACKAGING (WxDxH)
MISURE IMBALLO
740 x 850 x 2250 mm

SG32

CABINET 20 TRAYS
GN 2/1 -10°C/-25°C
36 ICE CREAM TUBS
CONSERVATORE 20 TEGLIE
GN 2/1 -10°C/-25°C
36 VASCHE

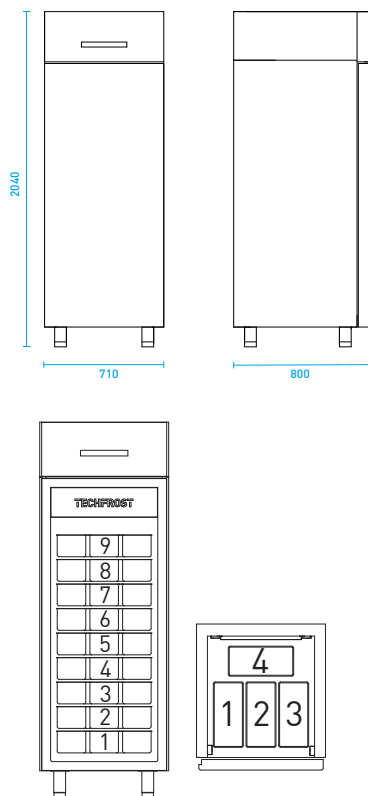

MODEL SG32


CODE 540C0115

CAPACITY TRAYS CAPACITA' TEGLIE 20 trays GN 2/1 20 teglie GN 2/1	CAPACITY LITERS CAPACITÀ LITRI 700	OPERATING TEMPERATURE TEMPERATURA DI ESERCIZIO -10°C / -25°C	POWER REQUIREMENTS ALIMENTAZIONE ELETTRICA 400V / 3Ph / 50Hz
EXTERNAL DIMENSIONS DIMENSIONI ESTERNE L:710 P/d:800 H:2040 mm	INTERNAL DIMENSIONS DIMENSIONI INTERNE L:650 P/d:675 H:1400 mm	POWER RATING POTENZA ASSORBITA 0,85 Kw / 4,5 A	COOLING CAPACITY RESA FRIGORIFERA (-10°C / +45°C) = 1168 W (-30°C / +45°C) = 322 W
DEFROSTING SBRINAMENTO Electric / Elettrico	REFRIGERANT GAS REFRIGERANTE R452A (GWP 2141)	NET/GROSS WEIGHT PESO NETTO/LORDO 140 kg / 150 kg	PACKAGING (WxDxH) MISURE IMBALLO 740 x 850 x 2250 mm

SUPREME LINE

SG35

CABINET 20 TRAYS
EN600X400 -2°C/+8°C
CONSERVATORE 20 TEGLIE
EN600X400 -2°C/+8°C

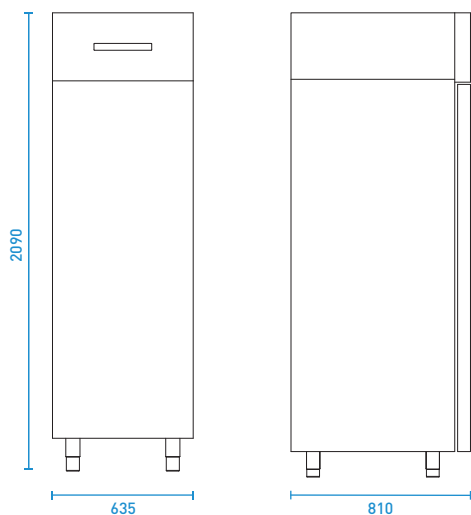

MODEL SG35
CODE 525C0115

CAPACITY TRAYS
CAPACITA' TEGLIE
20 trays 600 x 400
20 teglie 600 x 400

CAPACITY LITERS
CAPACITÀ LITRI
450

OPERATING TEMPERATURE
TEMPERATURA DI ESERCIZIO
-2°C / +8°C

POWER REQUIREMENTS
ALIMENTAZIONE ELETTRICA
230V / 1Ph / 50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:635 P/d:810 H:2090 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:495 P/d:660 H:1410 mm

POWER RATING
POTENZA ASSORBITA
0,68 Kw / 3,7 A

COOLING CAPACITY
RESA FRIGORIFERA
(+5°C / +45°C) = 1110 W
(-10°C / +45°C) = 645 W

DEFROSTING
SBRINAMENTO
Electric / Elettrico


REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
135 kg / 145 kg

PACKAGING (WxDxH)
MISURE IMBALLO
650 x 860 x 2230 mm

SG40

CABINET 20 TRAYS
EN600X400 -10°C/-25°C
30 ICE CREAM TUBS
CONSERVATORE 20 TEGLIE
EN600X400 -10°C/-25°C
30 VASCETTE

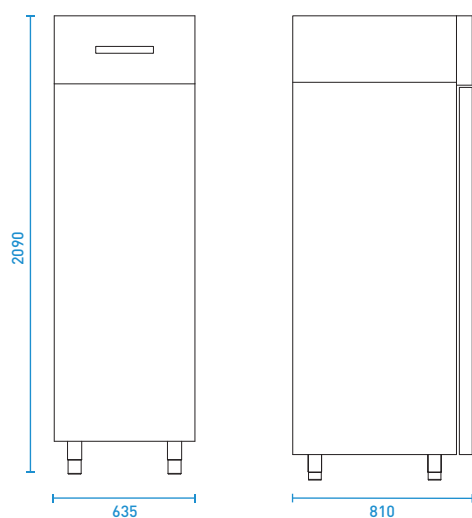

MODEL SG40
CODE 530C0115

CAPACITY TRAYS
CAPACITA' TEGLIE
20 trays 600 x 400
20 teglie 600 x 400

CAPACITY LITERS
CAPACITÀ LITRI
450

OPERATING TEMPERATURE
TEMPERATURA DI ESERCIZIO
-10°C / -25°C

POWER REQUIREMENTS
ALIMENTAZIONE ELETTRICA
230V / 1Ph / 50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:635 P/d:810 H:2090 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:495 P/d:660 H:1410 mm

POWER RATING
POTENZA ASSORBITA
0,865 Kw / 4,5 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°C / +45°C) = 1168 W
(-30°C / +45°C) = 322 W

DEFROSTING
SBRINAMENTO
Electric / Elettrico


REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
145 kg / 155 kg

PACKAGING (WxDxH)
MISURE IMBALLO
650 x 860 x 2200 mm

EG80

CABINET 20 TRAYS
EN600X800 -10°C/-25°C
54 ICE CREAM TUBS
CONSERVATORE 20 TEGLIE
EN600X800 -10°C/-25°C
54 VASCHETTE

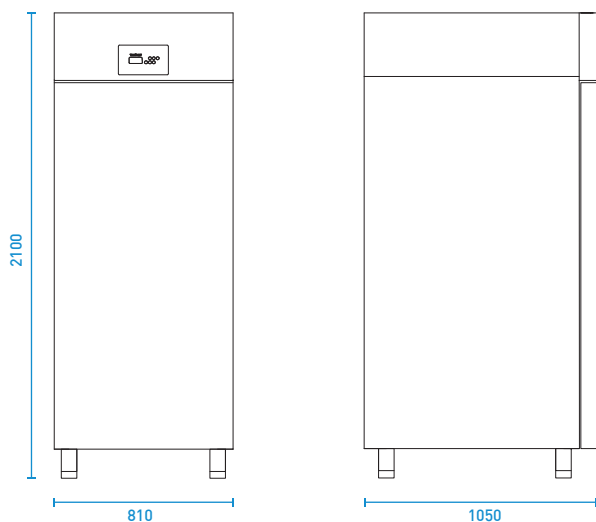

MODEL EG80
CODE 590C0110

CAPACITY TRAYS
CAPACITA' TEGLIE
20 trays 600 x 800
20 teglie 600 x 800

CAPACITY LITERS
CAPACITÀ LITRI
900

OPERATING TEMPERATURE
TEMPERATURA DI ESERCIZIO
-10°C / -25°C

POWER REQUIREMENTS
ALIMENTAZIONE ELETTRICA
400V / 3Ph / 50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:810 P/d:1050 H:2100 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:670 P/d:825 H:1630 mm

POWER RATING
POTENZA ASSORBITA
1,0 kw / 5,5 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°C / +45°C) = 1526 W
(-30°C / +45°C) = 624 W

DEFROSTING
SBRINAMENTO
Electric / Elettrico


REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
190 kg / 200 kg

PACKAGING (WxDxH)
MISURE IMBALLO
840 x 1100 x 2250 mm

SG80

CABINET 20 TRAYS
EN600X800 -10°C/-25°C
54 ICE CREAM TUBS
CONSERVATORE 20 TEGLIE
EN600X800 -10°C/-25°C
54 VASCHETTE

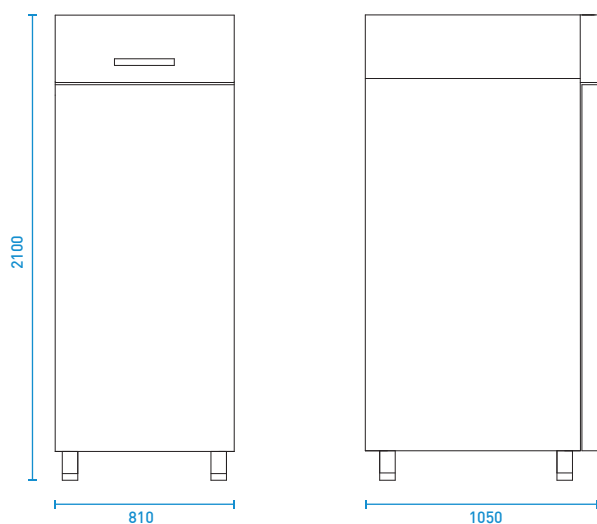

MODEL SG80

CODE 590C0115

CAPACITY TRAYS
CAPACITA' TEGLIE
20 trays 600 x 800
20 teglie 600 x 800

CAPACITY LITERS
CAPACITÀ LITRI
900

OPERATING TEMPERATURE
TEMPERATURA DI ESERCIZIO
-10°C / -25°C

POWER REQUIREMENTS
ALIMENTAZIONE ELETTRICA
400V / 3Ph / 50Hz

EXTERNAL DIMENSIONS
DIMENSIONI ESTERNE
L:810 P/d:1050 H:2100 mm

INTERNAL DIMENSIONS
DIMENSIONI INTERNE
L:670 P/d:825 H:1630 mm

POWER RATING
POTENZA ASSORBITA
1,0 Kw / 5,5 A

COOLING CAPACITY
RESA FRIGORIFERA
(-10°C / +45°C) = 1526 W
(-30°C / +45°C) = 624 W

DEFROSTING
SBRINAMENTO
Electric / Elettrico

REFRIGERANT
GAS REFRIGERANTE
R452A (GWP 2141)

NET/GROSS WEIGHT
PESO NETTO/LORDO
200 kg / 210 kg

PACKAGING (WxDxH)
MISURE IMBALLO
840 x 1100 x 2250 mm